

ALIMAK SCANDO 650 (Hire Fleet)


Your best choice for efficient construction hoists

General Specification

The Alimak Scando 650 Passenger/Goods Hoists can be used in single or dual configuration. The hoist cage design is truly modular and offers several optional cage lengths between 3.2m – 3.9m and 3.9m – 5m. depending upon the required capacity, the cage will be fitted with the two or three VFC frequency controlled motors or two direct online motors which drive the system through high efficiency gearboxes.

The Scando 650 operates at higher speeds starting from 42m/min, quicker than previous Alimak Passenger Goods Construction Hoists and provides more hoist power, while using as much as 40% less power than the previous Scando models. A modern control system with keypad in the cage and call buttons at the landings makes the hoist easy to operate and with the modern technology the Scando 650 range brings, the hoist will stop at the same point at each desired landing each time. A multiple choice of cage configurations and different size landing doors are available.

Capacity		
Payload capacity	kg	up to 3,200
Max. lifting height	m	200 (<i>increased lifting height on request</i>)
Cage width (internal)	m	1.5 or 2.0
Cage length (internal)	m	3.2 – 3.9 and 3.9 – 5.0
Cage height (internal)		2.3 – 2.8
Motor control		DOL or VFC (soft start)
No. of motors		2 – 3
Safety device type		GF/GFD
Power supply range		380-500 V 50 or 60Hz, 3 phase, 63a – 125a

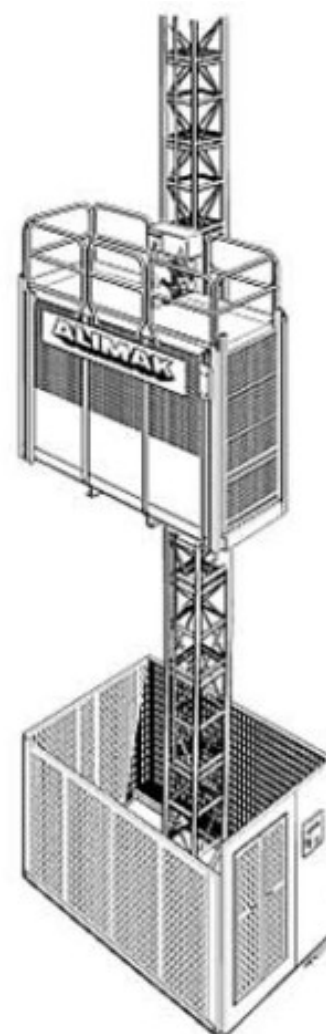

For further information, call: **0333 448 450** or email: info@brand-accesssolutions.com