

ALIMAK SCANDO M COMBI *(Hire Fleet)*


A heavy-duty machine for loads between 1,000 and 2,500kg

General Specification

The M Combi transports building materials such as dry lining, plasterboard and brick pallets in the manufacturers shrink wrap packaging direct to the workplace, clean and undamaged. The maximum standard platform size is 1.4 x 4.0m but can be extended to 1.4 x 6.2m. Robust loading ramps can be placed on three sides of the platform.

Mast, tie-ins and other accessories are interchangeable with the Scando passenger/materials hoist range.

Capacity		
Payload capacity	kg	1,000 – 2,500
Speed	m/min	26
Max. lifting height	m	100 <i>(increased lifting height on request)</i>
Car width (internal)	m	1.4
Car length (internal)	m	2.0 – 4.0 – 6.2
Car height (internal)		N/A
Motor control		DOL
No. of motors		2
Safety device type		GF/GFD
Power supply range		380-480 V, 50Hz, 3 phase
Type of mast		A-50, Tubular steel with integrated rack
Length mast section	m	1.508
Weight mast section with 1 rack	kg	118
Rack module		8

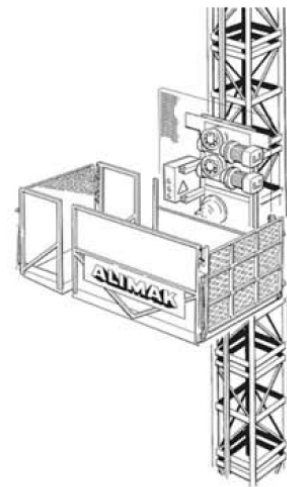

For further information, call: **0333 448 450** or email: info@brand-accesssolutions.com